

## JB06

### Features


- Cast aluminum, plastic-sprayed
- East to assemble and calibrate, high reliability
- Fully encapsulated, water-proof, moisture proof and lightning protected.
- Surge protection
- Sensitivity matched adjusting method
- Operating temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

### Description

- Specially designed for scales
- This model are available to connect 2 to 8 load cells with 4-wire or 6-wire cable on different requests.

### Optional table

Part number	Channels
JB06-2	2
JB06-3	3
JB06-4	4
JB06-6	6
JB06-8	8

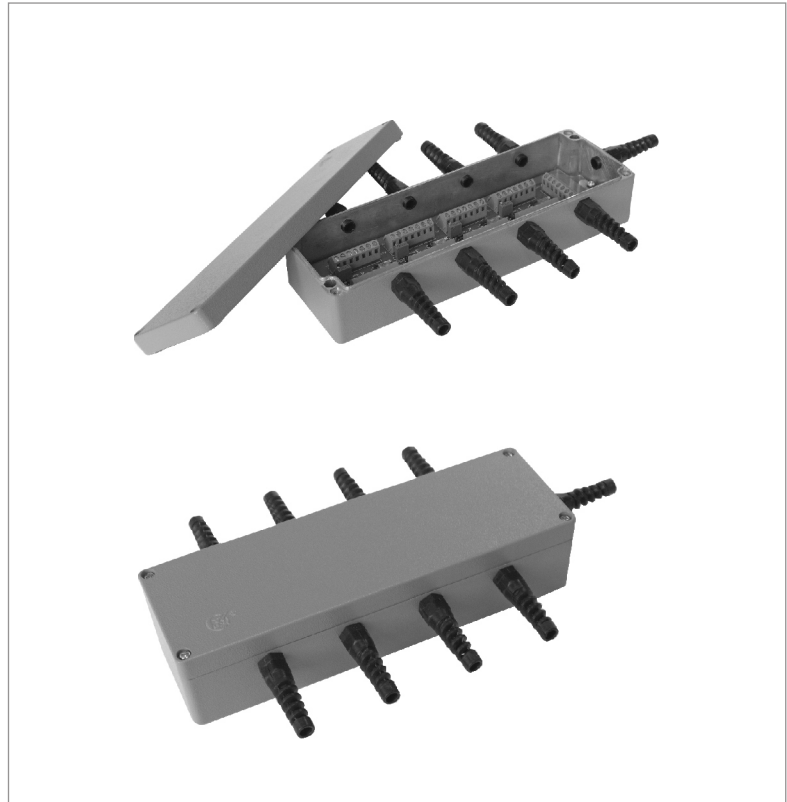

### Outline Dimension mm(inch)

